

HY-GT02 Animal Microchip


Product introduction

FDX animal microchip is designed exclusively for animals. The tag meets 134.2kHz ISO 11784/11785 FDX-B standard.

It contains a disposable syringe, a parylene coating microchip, 6 one-dimensional bar code labels and a sterilized paper-plastic packing pouch.



Applications

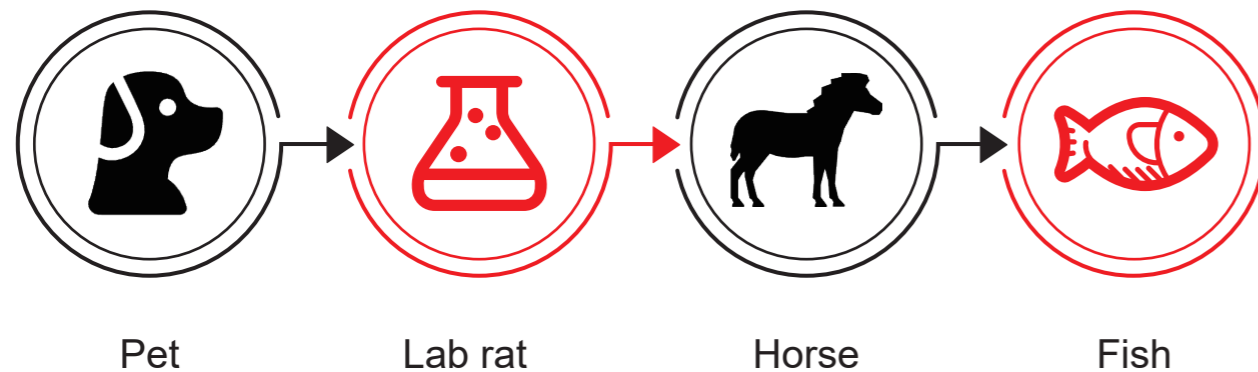

Product introduction

Operational Frequency	134.2Hz
Interface Protocol	ISO 11784/11785
Chip Type	EM4305
Memory Configuration	512 bits
Data Retention	10 Years
Write Cycle Endurance	100,000 cycles

Products Characteristics

Dimension	1.4x8mm
Reading Range	2-5cm
Material	Biocompatible glass
Packaging	Sterilized pouch
Application	Microchip for pet animal like dog,cat, Lab animal test like mouse

Environmental Specifications

Operating Temperature	-10°C~65°C
Storage Temperature	-20°C~65°C

Personalization

- 1 Customized specific encoding
- 2 Customized printing of logo, text, barcode etc

Drawing of Product

